


Full-Protection, Retractable Covers for Motorcycles, Scooters, ATV's, Bicycles and More! Congratulations!

You have just purchased the most innovative and practical Motorsport Shelter on the market! Your Speedway Motorsport Shelter is sure to provide you and your ride with many years of excellent protection and convenience.

Assembly Instructions

The design and construction of the Speedway Motorsport Shelter was well thought-out to provide maximum strength and stability as well as ease of assembly. The frame connects with a built-in spring clip system and the heavy-duty cover attached securely to the frame from inside the shelter makes the assembly a breeze!

NO TOOLS ARE REQUIRED for the assembly of your Speedway Shelter!

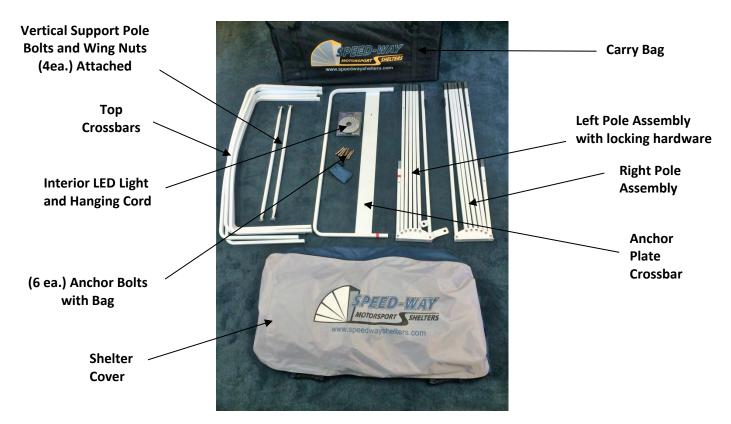

1. Find a clean, open space to layout all parts of your Speedway Shelter.

Speedway Motorsport Shelters - info@speedwayshelters.com - 831-477-9600

2. Lay down the anchor plate cross bar on a flat (level) open surface. The two black protective feet should be facing downward.



4. Connect the right side poles.



6. Attach all the top cross bar poles to the pole assembly sections, starting with the back pole which is connected to the vertical support poles.



8. Place the fabric cover over the frame with logo facing forward



3. Connect the short pole on each of the pole assemblies to the anchor plate crossbar.
Important: Make sure each pole assembly has the mounting plate (with the two holes) facing the outside!
Connect the two poles with colored red tape for correct installation



5. Use the four bolts and wing nuts (attached to the vertical poles) to attach the two vertical support poles to the frame.



7. Install the last cross bar pole and allow this pole to lay on the ground. This completes the frame assembly.



9. From inside of the Shelter, velcro the cover to the full-length anchor plate cross bar.



10. From inside of the shelter, velcro the sleeves (2 each for each pole) to each of the top cross bars of the shelter.



11. Attach the velcro along the full length front cross bar pole resting on the ground.



13. Fit the shelter by pulling the cover down around the corners.





12. Attach all the bottom velcro straps to the base poles of the shelter.



14. Windows can roll up and toggle to stay open for ventilation. The full velcro around the windows allows adjustable ventilation.



15. Attention! Your Speedway Shelter must be secured

to a solid surface to secure it properly in wind, and from other outside interferences. Use all 6 of the provided anchor bolts for cement or asphalt bolts and nuts for wood platforms



The Speedway Diamond-Tough Floor Mat is custom made to fit your Speedway Shelter.



19. Locking hardware allows you to better secure your Speedway Shelter!!



16. It is also popular to anchor your Speedway Shelter to a plywood base (**Not Required**). The below design is simple and allows water to flow under the Platform and assist with ventilation. **This is recommended**!



17. Your Speedway Shelter is equipped with two sewn-in tie-down contact points on each side for heavy wind conditions



IMPORTANT WARNING NOTICE:

Anchoring your Speedway Shelter to the ground or to a solid wood platform is required to assure it is properly secured to protect the Shelter and your vehicle in high wind conditions as well as from any outside interferences. We strongly suggest that you set up your Speedway Shelter in a protected area, lock it in the closed position and use guy ropes to secure it in adverse weather conditions. Extreme force storms (wind, heavy hail, etc.) may require the Shelter be moved or disassembled to prevent damage.

<u>SPECIAL NOTE</u>: Wind damage to the cover or frame does <u>not</u> constitute warranty replacement.

Care Instructions

Your Speedway Shelter will provide you years of use, if cared for correctly.

- Hand clean your Speedway Shelter using light pressure with warm water and light soap.
- Always secure your Speedway Shelter to a solid surface to protect it from high wind, falling or moving objects and unwelcome guests!
- We highly recommend that you find an elevated area or an area that allows for fast run-off of water to keep your vehicle and shelter area as dry as possible. A slightly elevated platform is a great solution for anchoring your shelter and keeping your space dry.
- If possible, find a location for your Speedway Shelter that is protected by a building or some other solid barrier.
- Some water repellents are acceptable for use to extend the life of your fabric cover. Use repellents that are normally used on Outdoor equipment -- such as tents, backpacks, and apparel.
- It is always good to keep the windows open a little for ventilation when the bike is hot, or the weather is humid and warm. Please adjust the window opening for your own conditions. In the event of rain or snow fall, close your windows.
- The fabric cover is treated with UV protection. However, for long term storage of your vehicle, you can extend the life of your Shelter with shade or a secondary tarp or cover.
- To minimize dust and moisture, consider purchasing the Speedway Shelter Diamond Tough floor, which is a high density, durable rubber material that fits your shelter space perfectly! It looks great too!

